



Model name			THMLd-4D/3HB -A	THMLd-6D/3HB -A	THMLd-8D/3HB -A	THMLd-10D/3HB -A	THMLd-12D/3HB -A	THMLd-14D/3HB -A	THMLd-16D/3HB -A	THMLd-12S/6(9) HBp-A	THMLd-14S/6(9) HBp-A	THMLd-16S/6(9) HBp-A		
Power supply	V/Phi/Hz		220-240/150		220-240/150							380-415/350		
Heating A7W35	Capacity	kW	4.20	6.22	8.00	9.50	12.10	14.50	16.00	12.10	14.50	16.00		
	Rated input	kW	0.82	1.27	1.60	1.98	2.42	3.05	3.54	2.42	3.05	3.54		
	COP		5.10	4.90	5.00	4.80	5.00	4.75	4.52	5.00	4.75	4.52		
Heating A7W45	Capacity	kW	4.35	6.35	8.00	9.50	12.05	14.25	16.00	12.05	14.25	16.00		
	Rated input	kW	1.14	1.69	2.11	2.60	3.14	3.83	4.42	3.14	3.83	4.42		
	COP		3.80	3.75	3.80	3.65	3.84	3.73	3.62	3.84	3.73	3.62		
Heating A7W55	Capacity	kW	4.40	6.00	7.40	9.00	12.00	14.00	16.00	12.00	14.00	16.00		
	Rated input	kW	1.49	2.03	2.38	3.00	3.85	4.65	5.49	3.85	4.65	5.49		
	COP		2.95	2.96	3.11	3.00	3.12	3.01	2.91	3.12	3.01	2.91		
Cooling A35W18	Capacity	kW	4.50	6.00	8.00	9.50	12.00	13.50	15.00	12.00	13.50	15.00		
	Rated input	kW	0.81	1.22	1.67	2.07	3.00	3.60	4.35	3.00	3.60	4.35		
	EER		5.55	4.92	4.80	4.60	4.00	3.75	3.44	4.00	3.75	3.44		
Cooling A35W7	Capacity	kW	4.50	6.00	7.00	8.00	11.60	12.95	14.30	11.60	12.95	14.30		
	Rated input	kW	1.28	1.93	2.14	2.53	4.20	4.98	5.70	4.20	4.98	5.70		
	EER		3.50	3.11	3.27	3.16	2.76	2.60	2.51	2.76	2.60	2.51		
SCOP ²	LWT at 35°C		4.60	4.65	5.07	5.05	4.77	4.63	4.56	4.77	4.63	4.56		
	LWT at 55°C		3.35	3.49	3.47	3.51	3.48	3.43	3.48	3.54	3.46	3.49		
Seasonal space heating energy efficiency class ³	LWT at 35°C		A+++											
Electric heater power input	LWT at 55°C		A++											
Electric heater power input	kW		3	3	3	3	3	3	3	6(9)	6(9)	6(9)		
MOP(Maximum overcurrent protection) ³	A		18	18	19	19	32	32	32	14	14	14		
	MCA(Minimum circuit amps)	A	12	14	16	17	25	26	27	10	11	12		
Compressor	Type		Twin rotary DC inverter											
Outdoor fan	Motor type		Brushless DC motor											
	Number of fans		1											
Throttle type			Electronic expansion valve											
Air side heat exchanger	Type		Finned tube											
Water side heat exchanger	Type		Plate type											
Refrigerant	Type		R32											
	Factory charge	kg	1.30	1.30	1.40	1.40	1.74	1.74	1.74	1.74	1.74	1.74		
	Sound power Level ⁴	dB	56	59	60	61	64	66	68	64	66	68		
	Sound pressure level ⁴	dB	44	46	47	50	53	54	55	53	54	55		
	Net dimensions (W×H×D)	mm	1220×709×390				1293×860×495							
	Packing dimension (W×H×D)	mm	1315×840×430				1395×996×535							
	Net/Gross weight	kg	76.0/87.0	76.0/87.0	95.0/116.0	95.0/116.0	112.0/133.0	112.0/133.0	112.0/133.0	124.0/145.0	124.0/145.0	124.0/145.0		
Piping connections			R5/4"	R5/4"	R5/4"	R5/4"	R5/4"	R5/4"	R5/4"	R5/4"	R5/4"	R5/4"		
Operation range	Cooling	°C	- 5 ~ 43											
	Heating	°C	- 25 ~ 35											
	DH-W	°C	- 25 ~ 43											
Water outlet	Cooling	°C	5 ~ 20											
	Heating	°C	25 ~ 65											
	DH-W	°C	20 ~ 60											

Abbreviations:	Notes:
DHW: Domestic hot water	1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811/2013; (EU) No 813/2013; OJ 2014/C 207/02.
LWT: Leaving water temperature	2. Seasonal space heating energy efficiency class tests in average climate conditions.
	3. Sound power test condition : EN12102-1.
	4. Sound pressure level is the maximum value tested under the two conditions of A7W35 and A35W18.

Split product parameters



Model name			THF-4D/ HBpO-A	THF-6D/ HBpO-A	THF-8D/ HBpO-B	THF-10D/ HBpO-B	THF-12D/ HBpO-A	THF-14D/ HBpO-A	THF-16D/ HBpO-A	THF-12S/ HBpO-A	THF-14S/ HBpO-A	THF-16S/ HBpO-A
Power supply		V/Phz	220-240/1/50			220-240/1/50			380-415/3/50			
Heating ATW35	Capacity	kW	4.20	6.22	8.00	9.50	12.10	14.50	16.00	12.10	14.50	16.00
	Rated input	kW	0.82	1.27	1.60	1.98	2.42	3.05	3.54	2.42	3.05	3.54
	COP		5.10	4.90	5.00	4.80	5.00	4.75	4.52	5.00	4.75	4.52
Heating ATW45	Capacity	kW	4.35	6.35	8.00	9.50	12.05	14.25	16.00	12.05	14.25	16.00
	Rated input	kW	1.14	1.69	2.11	2.60	3.14	3.83	4.42	3.14	3.83	4.42
	COP		3.80	3.75	3.80	3.65	3.84	3.73	3.62	3.84	3.73	3.62
Heating ATW55	Capacity	kW	4.40	6.00	7.40	9.00	12.00	14.00	16.00	12.00	14.00	16.00
	Rated input	kW	1.49	2.03	2.38	3.00	3.85	4.65	5.49	3.85	4.65	5.49
	COP		2.95	2.96	3.11	3.00	3.12	3.01	2.91	3.12	3.01	2.91
Cooling A35W18	Capacity	kW	4.50	6.00	8.00	9.50	12.00	13.50	15.00	12.00	13.50	15.00
	Rated input	kW	0.81	1.22	1.67	2.07	3.00	3.60	4.39	3.00	3.60	4.39
	EER		5.55	4.92	4.80	4.60	4.00	3.75	3.42	4.00	3.75	3.42
Cooling A35W7	Capacity	kW	4.50	6.00	7.00	8.00	11.60	12.95	14.30	11.60	12.95	14.30
	Rated input	kW	1.28	1.93	2.14	2.53	4.20	4.98	5.70	4.20	4.98	5.70
	EER		3.50	3.11	3.27	3.16	2.76	2.60	2.51	2.76	2.60	2.51
SCOP ²	LWT at 35°C		4.60	4.65	5.07	5.05	4.78	4.63	4.56	4.70	4.58	4.56
	LWT at 55°C		3.35	3.49	3.47	3.51	3.48	3.47	3.48	3.48	3.35	3.44
Seasonal space heating energy efficiency class ²	LWT at 35°C		A+++									
	LWT at 55°C		A++									
MOP(Maximum overcurrent protection) ¹⁾		A	18	18	19	19	32	32	32	14	14	14
MCA(Minimum circuit amps)		A	12	14	16	17	25	26	27	10	11	12
Compressor	Type		Twin rotary DC inverter									
Outdoor fan	Motor type		Brushless DC motor									
	Number of fans		1									
Throttle type			Electronic expansion valve									
Air side heat exchanger	Type		Finned tube									
	Type		R32									
Refrigerant	Factory charge	kg	1.30	1.30	1.65	1.65	1.84	1.84	1.84	1.84	1.84	1.84
	Sound power level ⁴⁾	dB	56	59	60	61	64	66	68	64	66	68
Sound pressure level ⁵⁾		dB	44	46	47	50	53	54	55	53	54	55
Net dimensions(W×H×D)		mm	845×700×375									
Packed dimensions(W×H×D)		mm	950×732×430									
Net/Gross weight		kg	45.5/48.0	45.5/48.0	62.0/75.0	62.0/75.0	78.0/90.5	78.0/90.5	78.0/90.5	90.0/102.5	90.0/102.5	90.0/102.5
Piping connections	Type		Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare
	Liquid Dia.	mm	Φ6.35	Φ6.35	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52	Φ9.52
	Gas Dia.	mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9	Φ15.9
	Min. pipelength	m	2	2	2	2	2	2	2	2	2	2
	Max. pipe length	m	30	30	30	30	30	30	30	30	30	30
Installation height	Outdoor unit above	m	20	20	20	20	20	20	20	20	20	20
	Outdoor unit below	m	20	20	20	20	20	20	20	20	20	20
Operating range	Cooling	°C	- 5 ~ 43									
	Heating	°C	- 25 ~ 35									
	DHW	°C	- 25 ~ 43									

Notes:

1. Relevant EU standards and legislation: EN14511; EN14825; EN50564; EN12102; (EU) No 811:2013; (EU) No 813:2013; OJ 2014/C 207/02:2014.
2. Seasonal space heating energy efficiency class tested in average climate conditions.
3. Test standard: EN12102-1.
4. Sound pressure level is the maximum value tested under the two conditions of A7W35 and A35W18.



Model name				SMKLD-4(6)D/3HBp- A	SMKLD-8(10)D/3HBp- B	SMKLD-12(14,16)D/3HBp-A
Function				Heating and cooling		
Water outlet	Cooling		℃	5 to 20		
	Heating		℃	25 to 65		
	DHW		℃	20 to 60		
Power supply			V/Ph/Hz	220-240/1/50	220-240/1/50	220-240/1/50
Electric heater power input			kW	3	3	3
Sound power level ¹			dB	38	42	44
Sound pressure level(1m) ²			dB	28	30	32
Net dimensions (W × H × D)			mm	420 × 790 × 270		
Packed dimensions (W × H × D)			mm	530 × 1035 × 355		
Net/gross weight			kg	44.0/50.0	41.0/47.0	42.0/48.0
Water circuit	Piping connections		inch	R1"		
	Safety valve set pressure		Mpa	0.3		
	Drainage pipe connection		mm	DN25		
	Expansion tank	Volume	L	8		
		Max. water pressure	MPa	0.3		
		Pre-pressure	Mpa	0.1		
	Heat exchanger		Type	Plate type		
water pump head		m	9			
Refrigerant circuit	Liquid Dia.		mm	Φ6.35	Φ9.52	Φ9.52
	Gas Dia.		mm	Φ15.9	Φ15.9	Φ15.9
	Excessive operating refrigerant pressure		MPa	4.3	4.3	4.3
Operating temperature range	Ambient temperature		℃	+5 ~ +35		
	Water pressure		MPa	0.1 ~ 0.3		

Notes:

1. Test standard: EN12102-1.
2. Sound pressure level is the maximum value tested under the two conditions of Note3 and Note4 for different combination between outdoor unit and hydronic box.
3. Outdoor air temperature 7°C DB, 85% R.H.; EWT 30°C, LWT 35°C.
4. Outdoor air temperature 35°C DB; EWT 23°C, LWT 18°C.



Worldwide Air Conditioner Partner




TECHNICAL SUPPORT, GLOBAL SALES COMPANY:
GD TCL INTELLIGENT HEATING & VENTILATING EQUIPMENT CO., LTD.
Tel: +86 0760 2820 3104
Website: <https://www.tcl.com/eu/en/heatpump>
E-mail: heatpump@tcl.com



Worldwide Air Conditioner Partner

R32 Tri-thermal ATW Heat Pump

Heating, cooling, hot water with complete solutions to the creative life

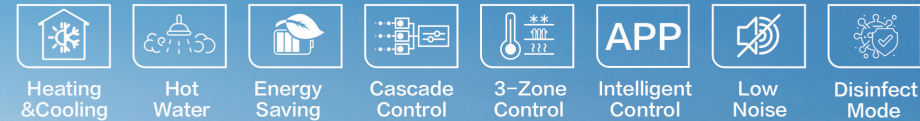

 Seasonal space heating energy efficiency
 η_s average up to **A+++** at 35°C
 η_s average up to **A++** at 55°C

 The maximum of leaving water temperature is **65°C**






Versatility

● Heating, cooling, hot water with complete solutions, to the creative life

Tri-thermal is an integrated system that provides space heating and cooling as well as domestic hot water, offering a complete, all-year-round solution which can remove the need for traditional gas or oil boilers, or work together with them.



● Compact fan coil unit cooling

- Ultra-thin body, comfortable and beautiful
- Multi-angle and all-directional wind supply

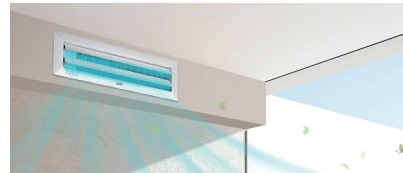

● Diversified heating

- Heating by floor heating, radiator and fan coil unit
- Safe and comfort

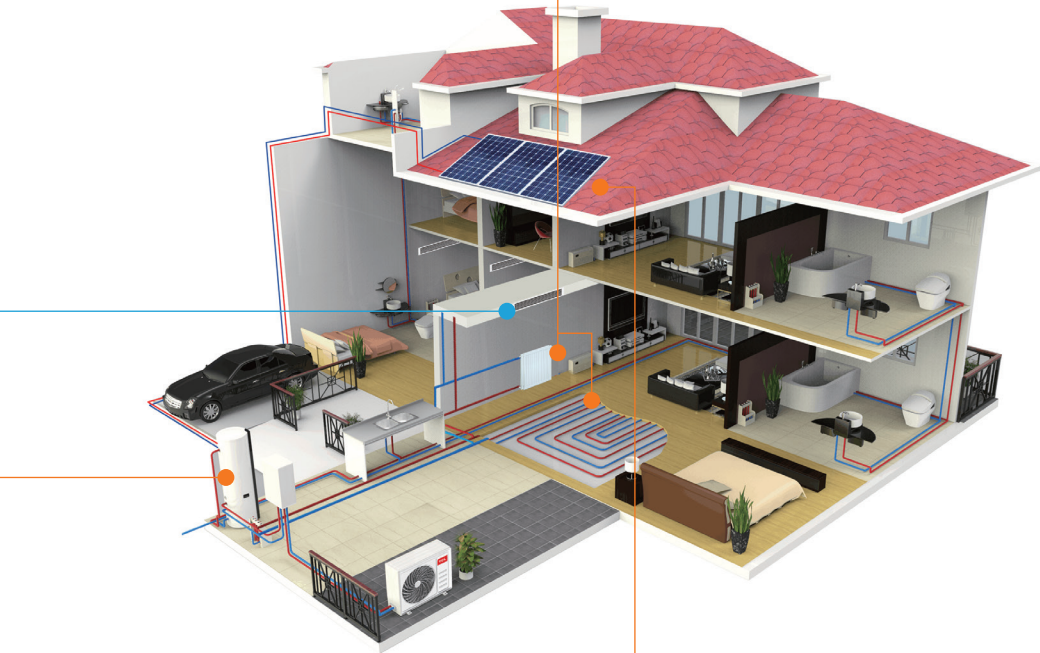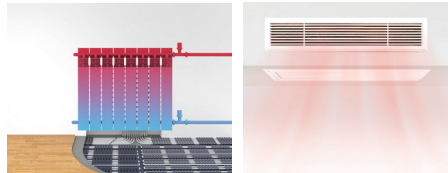

● Domestic hot water

- Provide DHW in time, heating quickly
- The maximum of leaving water temperature is 65°C



● Solar kit

- Work only & work with heat pump for DHW



* Auxiliary heat source

- Link with traditional gas boilers, industrial hot water and electric auxiliary heating

High Efficient and Energy Saving

● Well-known brand DC inverter compressor (GMCC)

High reliability electrical design

- High-current resistant & high-temperature resistant.

Large pressure ratio design

- Low suction pressure
- High exhaust pressure
- Heating at low ambient temperature

Low oil output design

- Optimized internal tank design
- Less lubricating oil required
- Effectively solves the problem of oil return



DC Inverter motor design

- High efficiency, the highest SCOP is 5.07

Low noise vibration design

- Vibration optimization of twin rotor
- Noise optimization of double-layer mufflers

High reliability volume design

- Large oil storage space
- Suitable for use in partial load conditions and long-pipe

● High efficient L-type heat exchanger


Adopting advanced 3-D dynamic analysis and cross-flow path design, air volume increased 8%, heat exchange more efficient.

Internal thread heat transfer pipe

- Using hydrophilic anti-corrosive fins, heat transfer efficiency increased 6%.


Corrugated fin

- Applying inner thread tube with 10% higher heat exchange efficiency.




● Stepless inverter fan motor

- Realize stepless speed regulation, and reduce power consumption by 20% compared with AC motors
- Original built-in drive, high motor efficiency, more reliable
- Stepless regulation of air volume, precise control
- Quiet operation
- Insulation grade E



● Plate heat exchanger

- Withstand high temperature and high pressure
- Compact design, smaller volume and less pressure drop
- High anti-corrosion performance
- High thermal efficiency and lower fouling factor
- Easy installation and maintenance
- Under the same pressure loss, the heat transfer coefficient of the plate heat exchanger is 3-5 times higher than that of the tubular heat exchanger, covering an area of 1/3 of the tubular heat exchanger.



● Multiple certifications



● Environmental friendly refrigerant


- The GWP of R32 is 675
- CO₂ equivalent is decreased 68% compared with R410a
- Save clients energy and protect the environment



Safe and Comfort


● Anti-bacteria mode

- Designed to guarantee our safe and health.
- It works by heating the water to about 70 degrees.

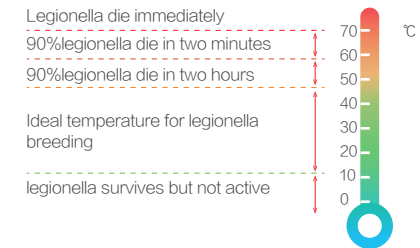

● Low level of noise

- Multiple silent modes are optional
- Silent mode, night silent mode, super silent mode.
- Optimized right & back side plates design
- Based on the 3-D simulation, which greatly decrease the vibration and running noise.

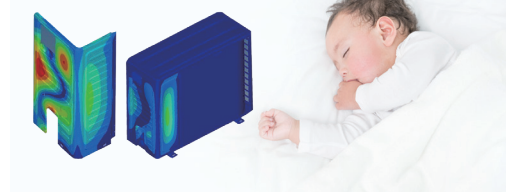

● Provide DHW in time

- Water pump
- Running smoothly



Electrical heater

- Heat DHW quickly
- As a back-up facility for inclement weather


- Solar kit heater
- Energy saving

● 3-zone control

- Connect max 3 zones at the same time and achieve different temperatures control in different zones.



Intelligent control

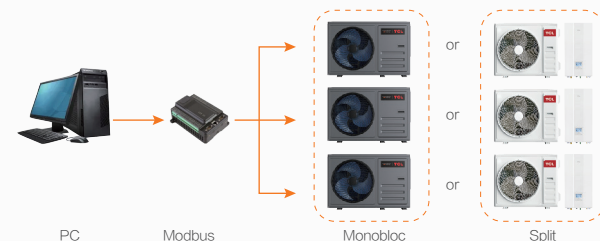

Easy to update the software
Convenient to define the system connections
Remotely monitor the heat pump

● Wired controller

- Liquid crystal, two-way communication, backlight at night
- Access to wifi with internet control
- Multiple languages are available
- Can set the parameters and query for faults
- Daily schedule and weekly schedule accurately control time and operation mode to prevent forgetting



● APP controller

- Modes adjustment
- Cascade control
- Power consumption record
- Sanitary hot water priority mode
- Unit status & fault information display
- Temp, Pump flow rate, timer setting, etc.

